




PALLETIZING

HIGH PERFORMANCE PALLETIZER PLS

- » Extremely gentle bag handling processes
- » Modular design for customized requirements
- » Flexible configuration of bag infeed and pallet outfeed
- » Palletizing up to 3,000 bags/h (petrochemicals) or 4,500 bags/h (building materials), depending on bag dimensions and layer pattern
- » Suitable for a variety of bag materials (PE, PP or paper) as well as bag and pallet formats
- » Optionally with cardboard/flat film protection anti-slip gluing system for improved load stability
- » High energy efficiency thanks to the latest servo drive technology & process optimization

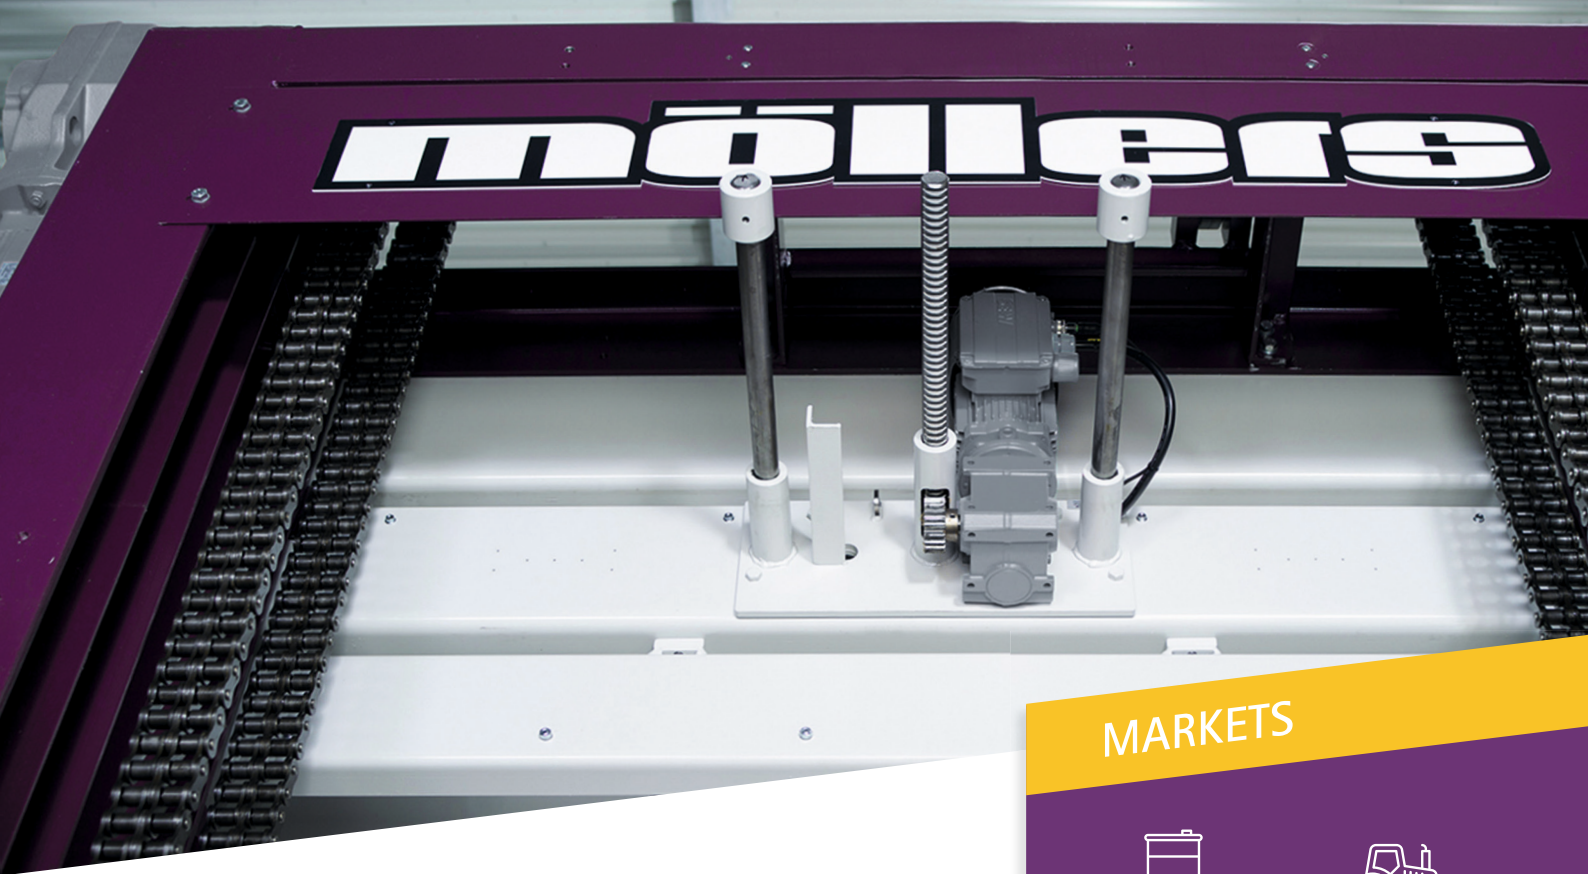

- » Automatic performance adjustment
- » Use of TorqLoc® for easy maintenance
- » Short installation times and fast commissioning thanks to the modular design of the machine

SPECIFICATIONS

- » Formats - All standard CP pallet formats (other dimensions on request)
- » Palletized goods formats
Length: 400 – 1,200 mm
Width: 200 – 600 mm
(other dimensions on request)
- » Stack weight (max)
2,000 kg
- » Load height (max)
2,700 mm

möllers
PACKAGING TECHNOLOGY GMBH

Möllers Packaging Technology GmbH | Rosalind-Franklin-Straße 2 | 59302 Oelde | Germany
Fon +49 2522 92018-0 | Mail sales@moellers.com | www.moellers.com

MARKETS



PETROCHEMICALS



FERTILIZER



CHEMICALS



FOOD



FEED



BUILDING MATERIALS

TAKE THE NEXT STEP TOWARDS EFFICIENCY

Talk to our experts to find out how our products can optimize your processes.

Fill out the contact form now and we will get in touch with you as soon as possible.



Scan the QR-Code to get in contact.